








WS Reverse Osmosis Purification System

-  State-of-the-art five-stage purification system
-  Colloidal silver to help maintain waterway cleanliness
-  Alkalinity and mineral enhancement
-  Certified by IAPMO according to NSF/ANSI 42 & 58
-  Compatible with all Wellsys equipment
-  Easy Installation



WS Reverse Osmosis Purification System

Multi-Stage Purification Process

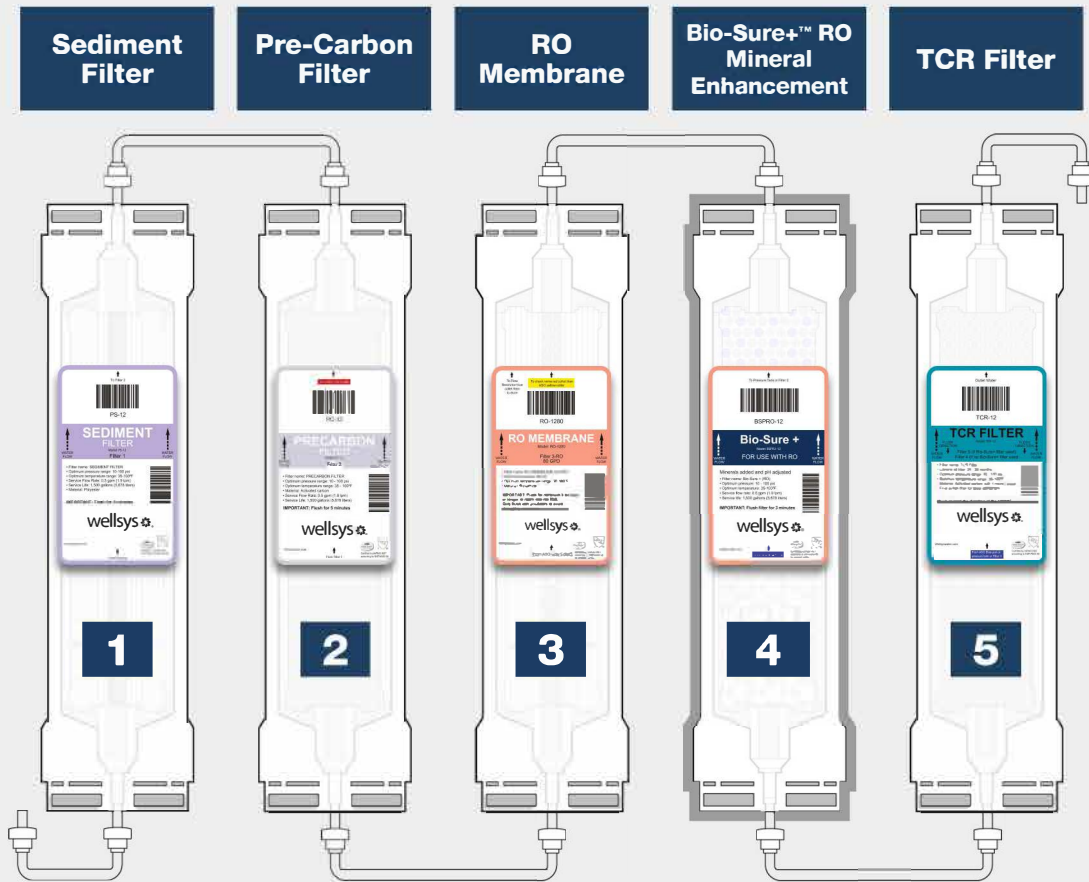

Description	Service life	Service flow rate	Optimum pressure	Dimensions
Sediment Filter	1,500 Gallons (5,678 L)	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
Pre-Carbon Filter	1,500 Gallons (5,678 L)	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
Reverse Osmosis (RO) Membrane	N/A	N/A	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	13.5" L x 2.5" D
Bio-Sure+™ Filter	1,500 Gallons (5,678 L)	0.50 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D
TCR Filter	1,500 Gallons (5,678 L)	0.60 GPM (1.9 LPM)	10 - 100 PSIG (0.7 - 6.9 bar), non-shock	12.5" L x 2.5" D